

# Product data sheet

## Characteristics

# ATV630D11N4

variable speed drive ATV630 - 11kW/15HP -  
380...480V - IP21/UL type 1



### Main

Range of product	Altivar Process ATV600
Product or component type	Variable speed drive
Product specific application	Process and utilities
Device short name	ATV630
Variant	Standard version
Product destination	Synchronous motors Asynchronous motors
Mounting mode	Wall mount
EMC filter	Integrated EN/IEC 61800-3 category C2 50 m Integrated EN/IEC 61800-3 category C3 150 m
IP degree of protection	IP21 IEC 61800-5-1 IP21 IEC 60529
Degree of protection	UL type 1 UL 508C
Type of cooling	Forced convection
Supply frequency	50...60 Hz - 5...5 %
Network number of phases	3 phases
[Us] rated supply voltage	380...480 V - 15...10 %
Motor power kW	11 kW normal duty 7.5 kW heavy duty
Motor power hp	15 hp normal duty 10 hp heavy duty
Line current	19.8 A 380 V normal duty 17 A 480 V normal duty 14.1 A 380 V heavy duty 12.5 A 480 V heavy duty
Prospective line Isc	50 kA
Apparent power	14.1 kVA 480 V normal duty 10.4 kVA 480 V heavy duty
Continuous output current	23.5 A 4 kHz normal duty 16.5 A 4 kHz heavy duty
Maximum transient current	25.9 A 60 s normal duty

	24.8 A 60 s heavy duty
Async motor control profile	Constant torque standard Optimized torque mode Variable torque standard
Synchronous motor control profile	Permanent magnet motor
Output frequency	0.0001...0.5 kHz
Speed drive output frequency	0.1...599 Hz
Nominal switching frequency	4 kHz
Switching frequency	2...12 kHz adjustable 4...12 kHz with derating factor
Safety function	STO (safe torque off) SIL 3
Discrete input logic	16 preset speeds
Communication port protocol	Ethernet Modbus TCP Modbus serial
Option card	Communication module Profibus DP V1 slot A Communication module Profinet slot A Communication module DeviceNet slot A Communication module Modbus TCP/EtherNet/IP slot A Communication module CANopen daisy chain RJ45 slot A Communication module CANopen SUB-D 9 slot A Communication module CANopen screw terminals slot A Digital and analog I/O extension module slot A/slot B Output relay extension module slot A/slot B Communication module Ethernet IP/Modbus TCP/MD-Link slot A

## Complementary

Output voltage	<= power supply voltage
Permissible temporary current boost	1.1 x In 60 s normal duty 1.5 x In 60 s heavy duty
Motor slip compensation	Not available in permanent magnet motor law Automatic whatever the load Can be suppressed Adjustable
Acceleration and deceleration ramps	Linear adjustable separately from 0.01...9999 s
Braking to standstill	By DC injection
Protection type	Safe torque off motor Motor phase break motor Safe torque off drive Overheating drive Short-circuit protection drive Motor phase break drive Overspeed drive Break on the control circuit drive Overtvoltages on the DC bus drive Overload of output voltage drive Line supply overvoltage drive Line supply phase loss drive Line supply undervoltage drive Overcurrent between output phases and earth drive Thermal protection motor Thermal protection drive
Frequency resolution	Display unit Analog input
Electrical connection	Removable screw terminals 0.5...1.5 mm <sup>2</sup> AWG 20...AWG 16 control Screw terminal 6...10 mm <sup>2</sup> AWG 10...AWG 8 motor Screw terminal 6 mm <sup>2</sup> AWG 10 line side
Type of connector	RJ45 Ethernet/Modbus TCP on the remote graphic terminal RJ45 Modbus serial on the remote graphic terminal
Physical interface	2-wire RS 485 Modbus serial
Transmission frame	RTU Modbus serial
Transmission rate	10/100 Mbit/s Ethernet IP/Modbus TCP 4.8, 9.6, 19.2, 38.4 kbit/s Modbus serial
Exchange mode	Half duplex, full duplex, autonegotiation Ethernet/Modbus TCP

Data format	8 bits, configurable odd, even or no parity Modbus serial
Type of polarization	No impedance Modbus serial
Number of addresses	1...247 Modbus serial
Method of access	Slave Modbus TCP
Supply	<p>Internal supply for reference potentiometer (1 to 10 kOhm) 10.5 V DC +/- 5 % &lt;= 10 mA overload and short-circuit protection</p> <p>External supply for digital inputs 24 V DC 19...30 V &lt;= 1.25 mA overload and short-circuit protection</p> <p>Internal supply for digital inputs and STO 24 V DC 21...27 V &lt;= 200 mA overload and short-circuit protection</p>
Local signalling	<p>3 LEDs local diagnostic</p> <p>3 LEDs dual colour embedded communication status</p> <p>4 LEDs dual colour communication module status</p> <p>1 LED red presence of voltage</p>
Width	171 mm
Height	409 mm
Depth	233 mm
Product weight	7.7 kg
Analogue input number	3
Analogue input type	<p>Software-configurable voltage AI1, AI2, AI3 0...10 V DC 30 kOhm 12 bits</p> <p>Software-configurable current AI1, AI2, AI3 0...20 mA/4...20 mA 250 Ohm 12 bits</p>
Discrete input number	8
Discrete input type	<p>Programmable DI1...DI6 24 V DC 3.5 kOhm</p> <p>Programmable as pulse input DI5, DI6 0...30 kHz 24 V DC</p> <p>Safe torque off STOA, STOB 24 V DC &gt; 2.2 kOhm</p>
Input compatibility	<p>Level 1 PLC EN/IEC 61131-2 DI1...DI6 discrete input</p> <p>Level 1 PLC IEC 65A-68 DI5, DI6 discrete input</p> <p>Level 1 PLC EN/IEC 61131-2 STOA, STOB discrete input</p>
Discrete input logic	<p>Positive logic (source) DI1...DI6 &lt; 5 V &gt; 11 V</p> <p>Negative logic (sink) DI1...DI6 &gt; 16 V &lt; 10 V</p> <p>Positive logic (source) DI5, DI6 &lt; 0.6 V &gt; 2.5 V</p> <p>Positive logic (source) STOA, STOB &lt; 5 V &gt; 11 V</p>
Analogue output number	2
Analogue output type	<p>Software-configurable voltage AO1, AO2 0...10 V DC 470 Ohm 10 bits</p> <p>Software-configurable current AO1, AO2 0...20 mA 10 bits</p>
Sampling duration	<p>2 ms +/- 0.5 ms DI1...DI4 discrete input</p> <p>5 ms +/- 1 ms DI5, DI6 discrete input</p> <p>5 ms +/- 0.1 ms AI1, AI2, AI3 analog input</p> <p>10 ms +/- 1 ms AO1 analog output</p>
Accuracy	<p>+/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input</p> <p>+/- 1 % AO1, AO2 for a temperature variation 60 °C analog output</p>
Linearity error	<p>+/- 0.15 % of maximum value analog input AI1, AI2, AI3</p> <p>+/- 0.2 % analog output AO1, AO2</p>
Relay output number	3
Relay output type	<p>Configurable relay logic R1 fault relay NO/NC 100000 cycles</p> <p>Configurable relay logic R2 sequence relay NO 100000 cycles</p> <p>Configurable relay logic R3 sequence relay NO 100000 cycles</p>
Refresh time	5 ms +/- 0.5 ms R1, R2, R3 relay output
Minimum switching current	5 mA 24 V DC R1, R2, R3 relay output
Maximum switching current	<p>3 A 250 V AC resistive 1 R1, R2, R3 relay output</p> <p>3 A 30 V DC resistive 1 R1, R2, R3 relay output</p> <p>2 A 250 V AC inductive 0.4 7 ms R1, R2, R3 relay output</p> <p>2 A 30 V DC inductive 0.4 7 ms R1, R2, R3 relay output</p>
Isolation	Between power and control terminals
Specific application	Utility
IP degree of protection	IP21
Variable speed drive application selection	<p>Building - HVAC compressor centrifugal</p> <p>Food and beverage processing other application</p> <p>Mining mineral and metal fan</p> <p>Mining mineral and metal pump</p> <p>Oil and gas fan</p> <p>Water and waste water other application</p> <p>Building - HVAC screw compressor</p> <p>Food and beverage processing pump</p>

	Food and beverage processing fan Food and beverage processing atomization Oil and gas electro submersible pump (ESP) Oil and gas water injection pump Oil and gas jet fuel pump Oil and gas compressor for refinery Water and waste water centrifuge pump Water and waste water positive displacement pump Water and waste water electro submersible pump (ESP) Water and waste water screw pump Water and waste water lobe compressor Water and waste water screw compressor Water and waste water compressor centrifugal Water and waste water fan Water and waste water conveyor Water and waste water mixer
Motor power range AC-3	7...11 kW 380...440 V 3 phases 7...11 kW 480...500 V 3 phases
Motor starter type	Variable speed drive

## Environment

Insulation resistance	> 1 mOhm 500 V DC for 1 minute to earth
Noise level	56 dB 86/188/EEC
Power dissipation in W	51 W natural convection 380 V 4 kHz 255 W forced convection 380 V 4 kHz
Volume of cooling air	103 m3/h
Operating position	Vertical +/- 10 degree
THDI	<= 48 % from 80...100 % of load IEC 61000-3-12
Electromagnetic compatibility	Conducted radio-frequency immunity test level 3 IEC 61000-4-6 1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5 Electrical fast transient/burst immunity test level 4 IEC 61000-4-4 Electrostatic discharge immunity test level 3 IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3
Pollution degree	2 EN/IEC 61800-5-1
Vibration resistance	1.5 mm peak to peak 2...13 Hz IEC 60068-2-6 1 gn 13...200 Hz IEC 60068-2-6
Shock resistance	15 gn 11 ms IEC 60068-2-27
Relative humidity	5...95 % without condensation IEC 60068-2-3
Ambient air temp for op	-15...50 °C without derating 50...60 °C with derating factor
Ambient air temperature for storage	-40...70 °C
Operating altitude	1000...4800 m with current derating 1 % per 100 m <= 1000 m without derating
Environmental characteristic	Chemical pollution resistance class 3C3 EN/IEC 60721-3-3 Dust pollution resistance class 3S3 EN/IEC 60721-3-3
Standards	EN/IEC 61800-3 EN/IEC 61800-3 environment 1 category C2 EN/IEC 61800-3 environment 2 category C3 UL 508C EN/IEC 61800-5-1 IEC 61000-3-12 IEC 60721-3 IEC 61508 IEC 13849-1
Product certifications	TÜV UL DNV-GL CSA ATEX zone 2/22 ATEX INERIS REACH
Marking	CE

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1513 - Schneider Electric declaration of conformity <a href="#"> Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#"><b>Reference not containing SVHC above the threshold</b></a>
Product environmental profile	Available <a href="#"> Product environmental</a>
Product end of life instructio	Available <a href="#"> End of life manual</a>

---

Dimensions

---


Drives with IP21 Top Cover

Front and Left View

Drives Without IP21 Top Cover

Left and Rear View


Clearances

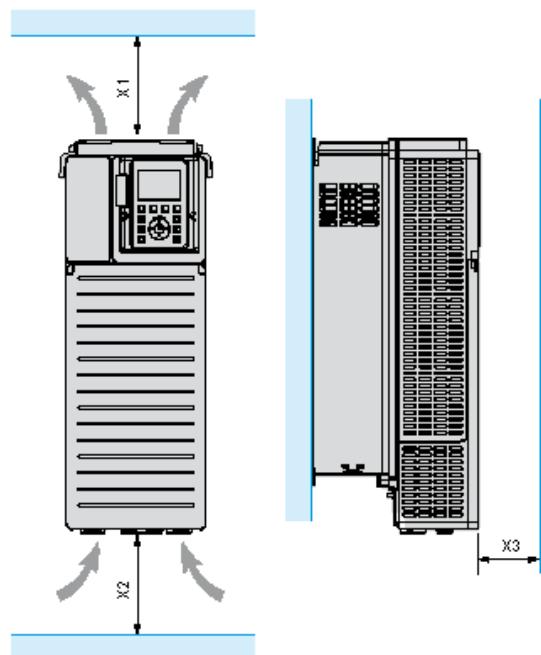

X1	X2	X3
≥ 100 mm (3.94 in.)	≥ 100 mm (3.94 in.)	≥ 10 mm (0.39 in.)


## Mounting Types

### Mounting Type A: Individual IP21

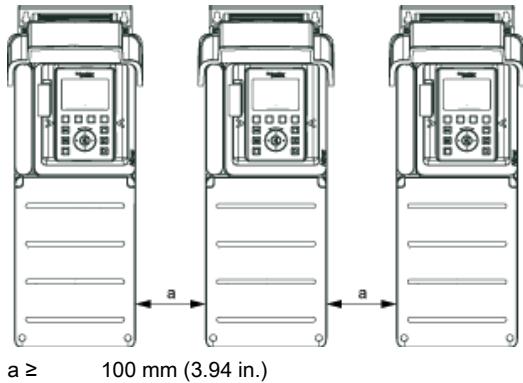


a ≥ 100 mm (3.94 in.)

### Mounting Type B: Side by Side IP20

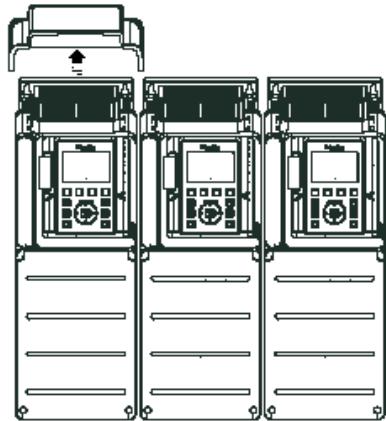

### Mounting Type C: Individual IP20

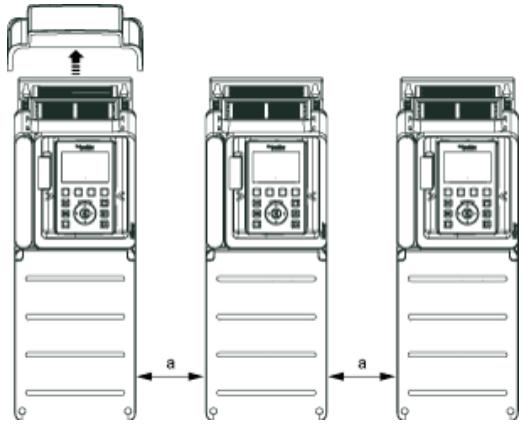

a ≥ 0

---

### Three-Phase Power Supply with Upstream Breaking via Line Contactor

---

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 61508

- (1) Line choke if used  
(2) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.  
A1 : Drive  
KM1 : Line Contactor  
Q2, Q3 : Circuit breakers  
S1, S2 : Pushbuttons  
T1 : Transformer for control part

---

### Three-Phase Power Supply with Downstream Breaking Contactor

---

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 61508

- (1) Line choke if used
  - (2) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.
- A1 : Drive  
KM1 : Contactor

## Control Block Wiring Diagram

- (1) Safe Torque Off
  - (2) Analog Output
  - (3) Digital Input
  - (4) Reference potentiometer
  - (5) Analog Input

R1A, R1B, R1C relay  
 R2A, R2C Sequence relay  
 R3A, R3C Sequence relay

## Sensor Connection


It is possible to connect either 1 or 3 sensors on terminals AI2 or AI3.

## Sink / Source Switch Configuration


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


### Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs

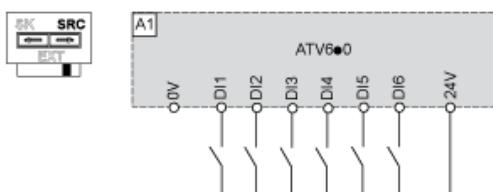


### Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs

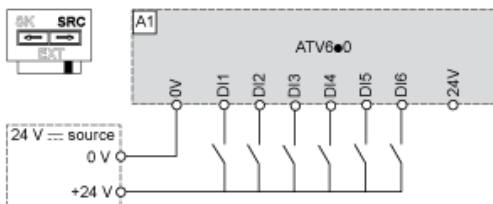

### Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs

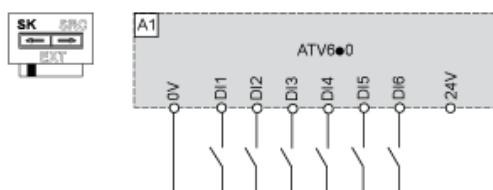


### Switch Set to EXT Position Using an External Power Supply for the DIs

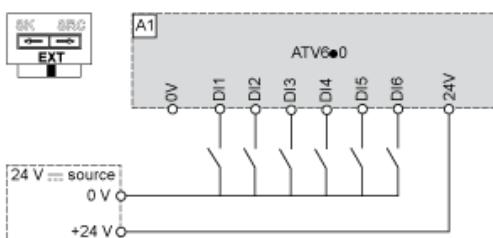

---

Derating Curves

---

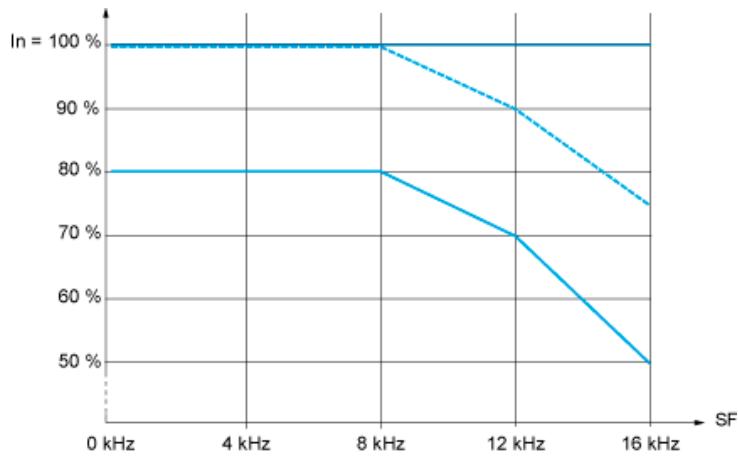

40 °C (104 °F) - Mounting type A, B and C

50 °C (122 °F) - Mounting type A, B and C

60 °C (140 °F) - Mounting type B and C

In : Nominal Drive Current

SF : Switching Frequency

**Our Proposal: Circuit Breaker + Contactor + Drive for Motor Power 11 kW and 380 or 440 VAC**

Motor power (kW)	ICU (kA)	Breaker	Contactor (*)	Motor Starter
11 kW for 380 V	50	 GV2L22	LC1D25P7	ATV630D11N4
11 kW for 440 V	20	 GV2L22	LC1D25P7	ATV630D11N4

Non contractual pictures.

(\*) You can select the contactor proposed or variants. Please consider examples hereafter or follow the link to the complete offer.

Motor power kW	Coil voltage VAC - 50/60 Hz	24	48	110	115	220	230	400	Other
11	LC1D25 ..	B7	E7	F7	FE7	M7	P7	V7	Complete Offer

Motor power kW	Coil voltage VDC	24	48	110	125	220	230	Other
11	LC1D25 ..	BD	ED	-	-	-	-	Complete Offer

Motor power kW	Coil voltage Low Consumption VDC - U 0.8...1.25	24	110	Other
11	LC1D25 ..	BL	FL	Complete Offer